



Product: Create  
Multiple colourways available

Installation Methods



Quarter Turn      Ashlar      Brick

All product specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. "Tufted Yarn Weight" refers to total input weight of yarn used in tufting process, and processes such as tufting and shearing will result in lower finished yarn weight in purchased carpet. Pile Density stated in the Product Specifications is based on the Tufted Yarn Weight. Product Specifications may be changed without notice as long as product performance is not materially affected.

Technical Specifications

Product Description:	Tufted multi-level loop modular carpet
Yarn / Fibre:	Type 6,6 Nylon
Colour System:	100% Solution dyed nylon
Machine Gauge:	1/12 <sup>th</sup> Gauge
Pile Weight:	610 g/m2
Pile Height:	4.0 mm ±0.5 mm
Total Thickness:	7.0 mm ±0.5mm
Tile Size:	500 mm x 500 mm
Backing Structure:	GlasBac®, GlasBac®RE & CushionBac™
Installation Method:	Quarter Turn, Ashlar, Brick
Preferred Installation Instructions:	Glue Free TacTile® Installation

Performance Specifications

Area Of Use:	Commercial extra heavy duty & stairs
Dimensional Stability:	Less than 0.2% variation
Anti-Static:	AATCC134 < 3000 Volts
Warranty:	15 Year Limited Warranty: <ul style="list-style-type: none"><li>▪ Manufacturing Defect</li><li>▪ Electrostatic Propensity</li><li>▪ Excessive Wear</li><li>▪ Dimensional Stability</li><li>▪ Castor Chair</li></ul>
LRV	Testing available on request. Please contact your account manager for more information.

Sustainability Specifications

Greenhouse Gas Emissions (GHG):	Qualifies for Interface's accredited Cool Carpet™ program option with zero net GHG emissions associated with the life cycle of the product.
Less Waste:	Modular carpet creates about 85% less installation waste than broadloom.
Recyclable:	GlasBac® & GlasBac®RE products qualify for recycling under Interface's optional ReEntry™ carpet reclamation program.

# Light Reflectance

This is the first in a series of documents and relates to contract or commercial carpet installed in multi person office accommodation where the carpet colourways tend to be medium to darker shades.

The selection of carpet shade is influenced by a range of factors that include cleaning maintenance and appearance retention properties as well as the comfort and safety of building occupants.

It has become important to understand the light reflectance of fit-out materials, including carpets, installed in commercial buildings in order to efficiently plan lighting and provide visual contrast where required.

Light Reflectance Value or LRV is a measurement commonly used in interior decorating and design. In the past there has been confusion surrounding the Light Reflectance Value, its measurement and relationship to major fit-out materials.<sup>1</sup>

In the absence of an Australian or International Standards Organization (ISO) test method, CIAL determined that British Standard BS 8493:2008 *Light Reflectance Value (LRV) of a Surface – Method of Test* is the most appropriate Standard - for determining the spectral reflectance of carpets using a spectrophotometer.

BS 8493:2008 measures the LRV of the specimen using CIE<sup>2</sup> Tristimulus Y10<sup>3</sup>, Illuminant D65<sup>4</sup> and the 10° colorimetric observer.<sup>5</sup>

## Footnotes

- 1 Light reflectance denotes the percentage of visible light reflected by a surface, weighted for the sensitivity to light of the human eye. Light reflectance values range from 0 (no reflectance) to 100 (absolute reflectance). For example, a LRV of 10 means the surface in question reflects 10% of the light striking it.
- 2 Commission Internationale de l'Eclairage or International Commission on Illumination is the world peak body for light and lighting, colour and vision.
- 3 The tristimulus values of a color are the amounts of three primary colors in a three-component color model. The measured light reflectance is defined by the tristimulus value Y.
- 4 The D series of illuminants portray standard illumination conditions at open-air in different parts of the world. D65 is the standard daylight illuminant.
- 5 Standard observation angle.

## Further Information

Contact Carpet Institute of Australia Limited on 03 9804 5559, email [info@carpetoz.com.au](mailto:info@carpetoz.com.au) or visit our website [www.carpetinstitute.com.au](http://www.carpetinstitute.com.au)

## About the Carpet Institute of Australia

The Carpet Institute of Australia Limited (CIAL) is the lead industry association for Australia's \$1.6 billion carpet industry. CIAL represents carpet manufacturers accounting for 95% of Australian carpet production, as well as retailers and suppliers of goods and services to the industry.


**Carpet Institute of Australia Limited** ABN 11 006 829 303

PO Box 7172, St Kilda Road, Melbourne 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560

Email: [info@carpetoz.com.au](mailto:info@carpetoz.com.au) • Web: [www.carpetinstitute.com.au](http://www.carpetinstitute.com.au)

Commonly available carpet types and colourways have been tested to determine LRV.


Guide to LRV for Textile Floor Covering Installations

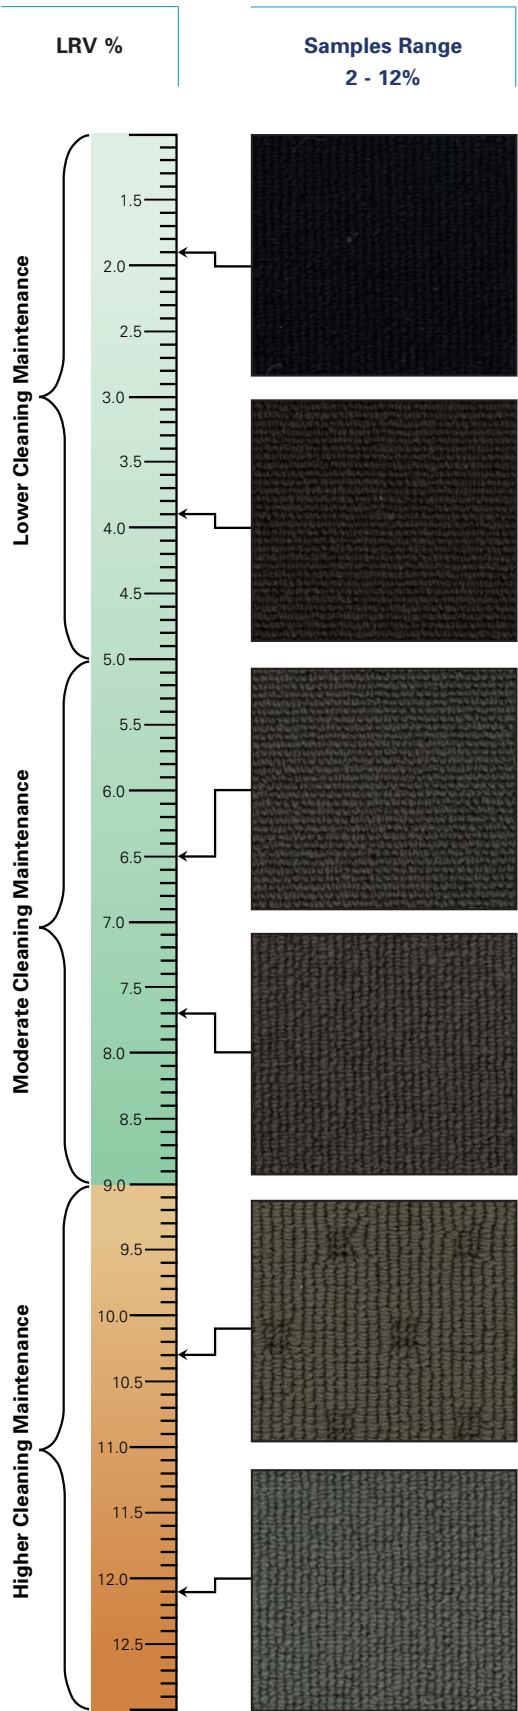

The installation environment is a multi-person commercial or contract office typically requiring a minimum Australian Carpet Classification Scheme (ACCS) grading of Contract Heavy Duty.

While an LRV range of 1% to 12% may be considered acceptable during the fit-out concept stage, caution must be exercised in the choice of carpet shades that have a measured LRV of 8% to 12% as a higher level of cleaning maintenance will be required to retain an acceptable level of appearance retention over the life of the carpet.

Carpets with LRV results greater than 13% will need a correspondingly very high level of cleaning maintenance in a commercial/contract environment.

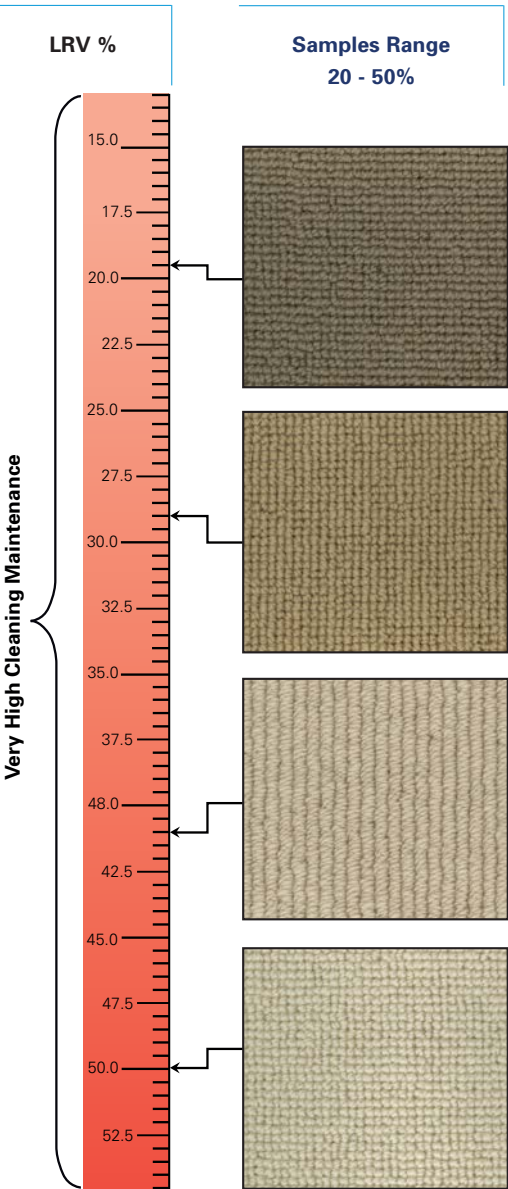

Disclaimer

The information in this document is provided free of charge as a courtesy to industry. Whilst the Carpet Institute of Australia Limited makes every effort to provide a high quality service, concerning the accuracy, completeness or fitness for a particular purpose of the information. The Carpet Institute of Australia Limited accepts no responsibility for any interpretation or decision based on this information.